

# 1968 Datsun SPL311 Console Harness LHD


By Curtis Marsten ©2014

This drawing is for information only and may contain errors. It may be used freely for noncommercial purposes.

Sheet size: 24" x 18" Architectural C

## Notes:

1. Wire gauge callouts based on best guess.
2. Diagram created from original 40 plus year old Nissan/Datsun Harnesses, schematics and use of ohmmeter. Later harnesses from Nissan may have color changes to wires. Consult schematics on 311s.org for notes on this.
3. Drawing is a graphical representation and not to scale.

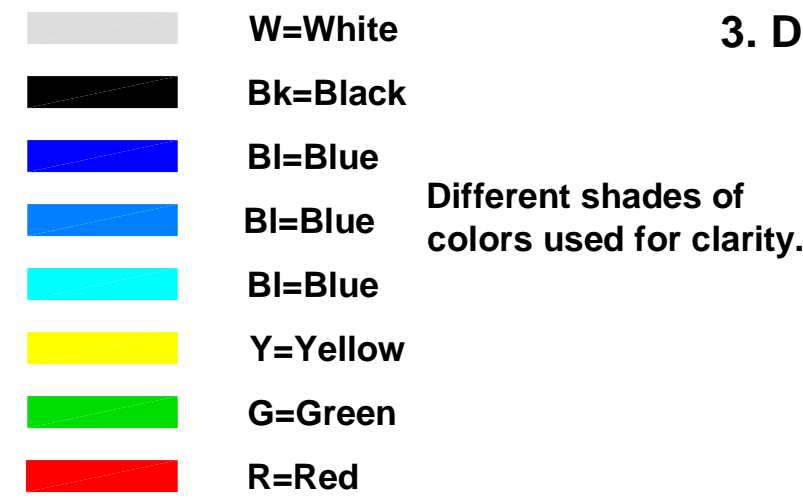

### To Dash Harness

Color	Ga	Connects to:	Connection type:
G/R	14	Left Turn	Plug
G/ W band	14	Hazard Flasher	Plug
G/Bk	14	Right Turn	Plug
G/ R band	14	Flasher Power	Plug
Y/BI	14	S Brake Switch	Plug
G	14	Turn Flasher	Plug

Color	Ga	Connects to:	Connection type:
B/R	14	Heater Switch Mid	Plug
BI	14	Heater Switch Power	Plug
B/Bk	14	Heater Switch Low	Plug
BI/W	14	Lighter	Plug
Bk	14	S Brake Switch	Plug
BI/W	14	Heater Switch High	Plug

Color	Ga	Connects to:	Connection type:
G	14	Turn Flasher	Plug
G/Bk	14	Right Turn	Plug
G/ W band	14	Hazard Flasher	Plug
G/R	14	Left Turn	Plug
G/ R band	14	Flasher Power	Plug

Color	Ga	Connects to:	Connection type:
BI	14	Heater Switch Power	Plug
B/R	14	Heater Switch Mid	Plug
B/Bk	14	Heater Switch Low	Plug
BI/W	14	Heater Switch High	Plug

Color	Ga	Connects to:	Connection type:
BI	14	Radio	Bullet-Socket
Y/BI	14	S Brake Switch	Blade-F
Bk	14	S Brake Switch	Blade-F

Color	Ga	Connects to:	Connection type:
BI/W	14	Lighter	Ring
R/BI	14	Map Light	Blade-F

Splice