<section-header></section-header>	
Turn SwitchColorGaConnects to:Connection type:W14Turn Flasher-PowerPlugColorGaConnects to:Connection type:G/Y16Right TurnPlug	

urn Sw	itch	ı	
Color	Ga	Connects to:	Connection type:
w	14	Turn Flasher-Power	Plug
Color	Ga	Connects to:	Connection type:
G/Y	16	Right Turn	Plug
Color	Ga	Connects to:	Connection type
Bk/green band	16	Horn Button	Plug
2109.001.04114	10	nom Batton	
Color	Ga	Connects to:	Connection type
W/Bk	16	Rear T/S Right	Plug
Color	Ga	Connects to:	Connection type
G/Bk	16	Right Turn	Plug
Color	Ga	Connects to:	Connection type
Bk/red band	16	High-Low Switch	Plug
Color	Ga	Connects to:	Connection type
Open			
Color	Ga	Connects to:	Connection type
W/R	16	Rear T/S Left	Plug
Color	Ga	Connects to:	Connection type
G/R	16	Left Turn	Plug

	//
	7

# By Curtis Marsten ©2014

This drawing is for information only and may contain errors. It may be used freely for noncommercial purposes. Sheet size: 36" x 48" Architectural E

#### Notes:

1. Wire gauge callouts based on best guess. 2. Diagram created from original 40 plus year old Nissan/Datsun harnesses, schematics and use of ohmmeter. Later harnesses from NIssan may have color changes to wires. Consult schematics on 311s.org for notes on this.

3. Drawing is a graphical representation and not to scale.



 
 Color
 Ga
 Connects to:
 Connection type:

 G/Y
 14
 Brake Safety Light
 Bullet-Socket

 Color
 Ga
 Connects to:
 Connection type:

 Y/BI
 16
 Brake Safety Light
 Bullet

 Gauge Voltage Regulator

 Color
 Ga
 Connects to:
 Connection type:

 B/W
 16
 Power-Gauge VR
 Blade-F

 Color
 Ga
 Connects to:
 Connection type:

 Y/R
 16
 Gauge VR to Gauges
 Blade-F

 Color
 Ga
 Connects to:
 Connection type:


 W
 10
 Ammeter-Pos.
 Ring

 Color
 Ga
 Connects to:
 Connection type:


 W/R
 10
 Ammeter-Neg.
 Ring

Left Turn Ind. Light

Right Turn Ind. Light

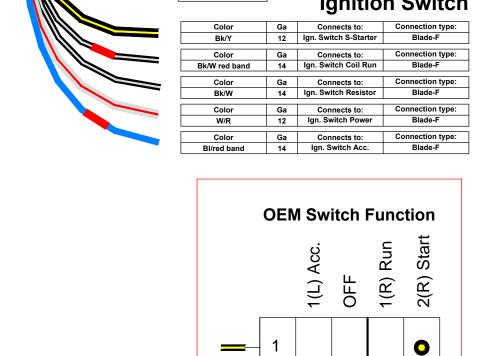

Ignition Switch



## 1969-70 Datsun SPL311 & SRL311 Dash Harness LHD

 
 Color
 Ga
 Connects to:
 Connection type:


 B
 14
 Distributer
 Blade-F
 SRL311 2000 Model Only 
 Color
 Ga
 Connects to:
 Connection type:


 Y/W
 16
 Temperature Sensor
 Bullet-Socket

 Color
 Ga
 Connects to:
 Connection type:

 G/Y
 14
 Brake Sensor on Firewall
 Bullet-Socket

Different shades of colors used for clarity.

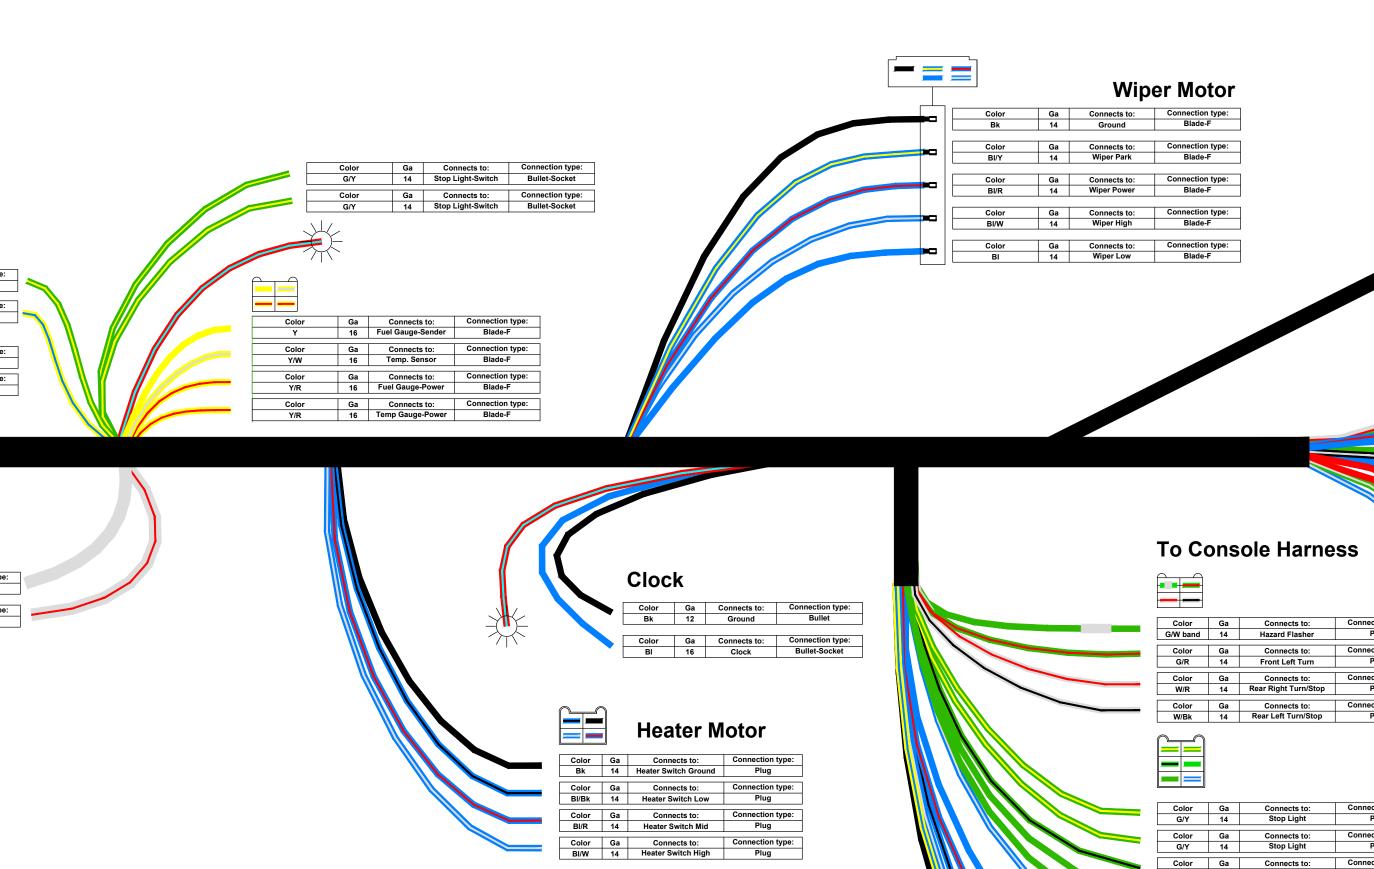

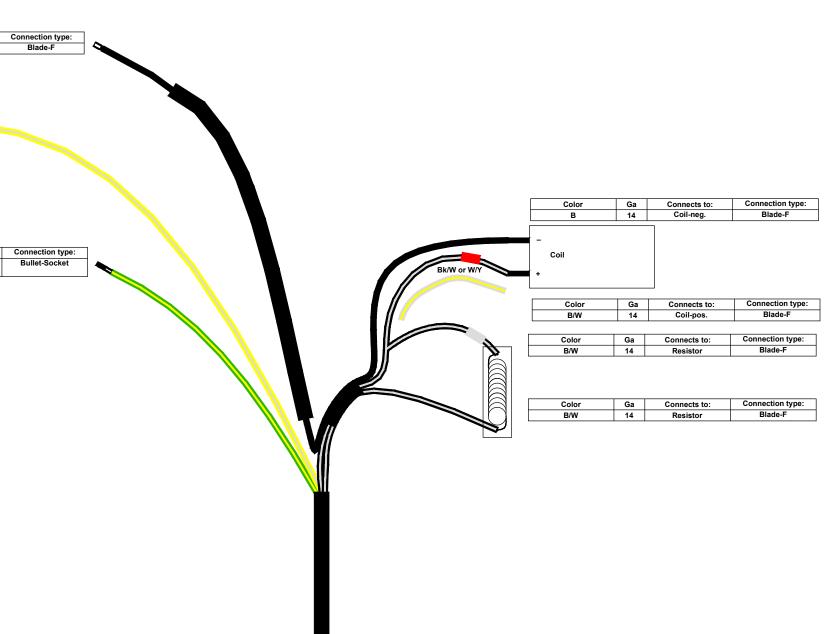

ess	

## Color Ga Connects to: Connection type: G/W band 14 Hazard Flasher Plug Color Ga Connects to: Connection type: G/R 14 Front Left Turn Plug

	Ga	Connects to:	Connection type:
	14	Rear Right Turn/Stop	Plug
	Ga	Connects to:	Connection type:
	14	Rear Left Turn/Stop	Plug
		•	
$\bigcirc$			
_			

Color	Ga	Connects to:	Connection type:
G/Y	14	Stop Light	Plug
0.1		0	Connection type
Color	Ga	Connects to:	Connection type:
G/Y	14	Stop Light	Plug
Color	Ga	Connects to:	Connection type:
G/Bk	14	Front Right Turn	Plug
			-
Color	Ga	Connects to:	Connection type:
G	14	Turn Flasher	Plug
0.1		<b>0</b>	Connection type
Color	Ga	Connects to:	Connection type:
G	14	Turn Flasher	Plug
Color	Ga	Connects to:	Connection type:
BI/W	14	Lighter	Plug

#### 

Ga	Connects to	: Connection type:
14	Heater Switch Po	ower Plug
Ga	Connects to	Connection type:
14	Heater Switch I	Vid Plug
Ga	Connects to	Connection type:
14	Heater Switch L	.ow Plug
Ga	Connects to	Connection type:
14	Heater Switch H	ligh Plug
Ga	Connects to	: Connection type:
14	S Brake Switc	h Plug
Ga	Connects to	Connection type:
14	S Brake Swite	h Plug

To Fuse BoxColorGaConnects to:Connection type:W/R10Main PowerRingColorGaConnects to:Connection type:G/W14HornRing === To Fuse Box

Color	Ga	Connects to:	Connection type:
BI/R	14	Wiper/Washer	Plug
Color	Ga	Connects to:	Connection type:
BI	14	Heater/Radio	Plug
Color	Ga	Connects to:	Connection type:
G/ red band	14	Horn/Stop	Plug
Color	Ga	Connects to:	Connection type:
Bk/W	14	VR/GVR/Reverse	Plug
Color	Ga	Connects to:	Connection type:
BI/ red band	14	Acc. Power	Plug
		Connects to:	Connection type:
Color	Ga	Connects to.	Connection type.
Color Bk/W	Ga 14	From Ign. Sw to fuse & resistor	Plug
		From Ign. Sw to fuse & resistor	
		From Ign. Sw to fuse & resistor	Plug
Bk/W	14	From Ign. Sw to fuse & resistor	<sup>Plug</sup>
Bk/W	14 Ga	From Ign. Sw to fuse & resistor TO F Connects to:	Plug USE BO) Connection type:
Bk/W	14 Ga 12	From Ign. Sw to fuse & resistor TO F Connects to: Headlights Right	Plug USE BO) Connection type: Plug
Bk/W Color Bl/Bk Color	14 Ga 12 Ga	From Ign. Sw to fuse & resistor TO F Connects to: Headlights Right Connects to:	Plug USE BO) Connection type: Plug Connection type:
Bk/W Color Bl/Bk Color R/bl band	14           Ga           12           Ga           12	From Ign. Sw to fuse & resistor TO F Connects to: Headlights Right Connects to: Headlights Left	Plug USE BO) Connection type: Plug Connection type: Plug Plug
Bk/W Color Bl/Bk Color R/bl band Color	Ga Ga 12 Ga 12 Ga Ga	From Ign. Sw to fuse & resistor TO F Connects to: Headlights Right Connects to: Headlights Left Connects to:	Plug USE BO) Connection type: Plug Connection type: Plug Connection type: Plug Connection type: Plug Connection type: Connect